

COLOR OPTIONS:

- White
- Almond

GLASS OPTIONS:

- Low-E glass
- Low-E glass with Argon gas
- Brass grid and decorative glass
- 5/8" and 3/4" flat and 1" contoured grids available

DIMENSIONS & SPECIFICATIONS

O=fixed panel
X=operable panel



Nominal Size	Opening Size	Exact Size Without Fin
5068	59 1/2" X 80"	58 3/4" X 79 1/2"
6068	71 1/2" X 80"	70 3/4" X 79 1/2"
6468	75 1/2" X 80"	74 3/4" X 78 1/2"
8068	95 1/2" X 80"	94 3/4" X 79 1/2"
9068	108 1/4" X 80"	107 1/2" X 79 1/2"
12068	144 1/4" X 80"	143 1/2" X 79 1/2"
12068	140 5/8" X 80"	139 7/8" X 79 1/2"
5080	59 1/2" X 96"	58 3/4" X 95 1/2"
6080	71 1/2" X 96"	70 3/4" X 95 1/2"
6480	75 1/2" X 96"	74 3/4" X 95 1/2"



What's behind your new Proview patio door? Fifty years of solid experience. We've spent a half-century researching, designing, building, and improving doors and windows. Now we've got it down to a science. Yet we're continually looking for ways to make the best even better. That means ongoing research and development. Constant engineering advances. And a ceaseless pursuit of excellence.

norandex / **REYNOLDS**
 BUILDING PRODUCTS / BUILDING PRODUCTS
 AN OWENS CORNING COMPANY
 8450 SOUTH BEDFORD ROAD
 MACEDONIA, OHIO 44056-8000
 (330) 468-2200 FAX: (330) 468-8118
 www.norandex.com

Proview Vinyl Patio Doors



PROVIEW
 By norandex

THE PROVIEW #332 SLIDING PATIO DOOR:

DP RATING R50 (ON 5068 & 6068)

- 1 7/8" insulated Warm-Edge sealant system with tempered glass for reduced condensation and energy efficiency.
- 2 All-welded frame and panel pre-assembled for easy installation.
- 3 Reversible panel design allows for moving panel to be located on left or right side (6'8 height only).
- 4 Aluminum track for moving panel.
- 5 Screen comes standard.
- 6 4 9/16" Jamb depth.
- 7 Multi-Point Lock
- 8 8' height available

ALSO FEATURES



Foot Bolt Lock (optional)



Brick Mould J-Channel (optional)



Multi-Point Lock (standard)




Hide-Rite Retractable Screen (optional) on 2 panel doors only

THE PROVIEW #312 SLIDING DOOR:

GOOD LOOKS PLUS EXTRA SECURITY

- 1 Reversible sliding panel offers you flexibility. Install to open either left or right. Both panels come reinforced with roll-formed steel for added strength and durability.
- 2 Our door frame and panels are fully welded, fully assembled. (Most others are not.)
- 3 7/8" insulated Warm-Edge glass system resists condensation, boosts efficiency.
- 4 Interlocking panels virtually eliminate air infiltration.
- 5 Removable prepunched nailing fin makes installation simple – whether you're installing the door as a replacement or in new construction.
- 6 Factory-installed screen needs only minor adjustments for a perfect fit on site.
- 7 Deluxe brass-finished hardware with key lock adds beauty and security.

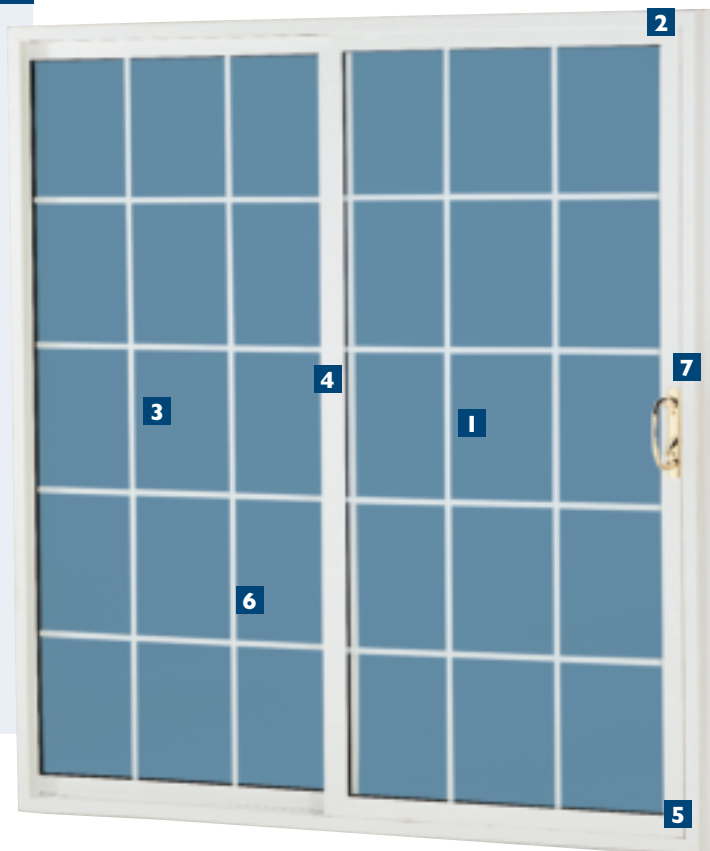

COLOR OPTIONS:

- White
- Almond

GLASS OPTIONS:

- Low-E glass
- Low-E glass with Argon gas
- Krypton Gas
- Brass grid and decorative glass
- 5/8" and 3/4" flat and 1" contoured grids available

ALSO AVAILABLE:

- Side lites
- Transoms and specialty shapes
- Upgraded deluxe heavy-duty screen
- Light Natural and Dark Hillside shades of oak Interior Wood Finish (white exterior only); Bronze Exterior Finish (white window only)

DIMENSIONS & SPECIFICATIONS

O=fixed panel
X=operable panel




Nominal Size	Opening Size	Exact Size Without Fin
5068	59 1/2" X 80"	58 3/4" X 79 1/2"
6068	71 1/2" X 80"	70 3/4" X 79 1/2"
6468	75 1/2" X 80"	74 3/4" X 78 1/2"
8068	95 1/2" X 80"	94 3/4" X 79 1/2"
9068	108 1/4" X 80"	107 1/2" X 79 1/2"
12068	144 1/4" X 80"	143 1/2" X 79 1/2"
12068	140 5/8" X 80"	139 7/8" X 79 1/2"

4 9/16" and 6 9/16" wood jamb extender kits available for new construction applications.

THE PROVIEW #311 SLIDING DOOR:

MAINTENANCE-FREE SOLID VINYL CONSTRUCTION

- 1 All-welded frame and panel pre-assembled for easy installation.
- 2 Reversible panel design allows for moving panel to be located on left or right side. (Please specify if required design is other than standard XO.)
- 3 Integrated nailing fin.
- 4 Sliding panel and meeting rail reinforced with roll-formed steel ensure rigidity and strength.
- 5 Aluminum track for moving panel.
- 6 Interlocking panel virtually eliminates air infiltration.
- 7 7/8" insulated Warm-Edge sealant system with tempered glass.
- 8 White enamel exterior handle and oak interior handle.

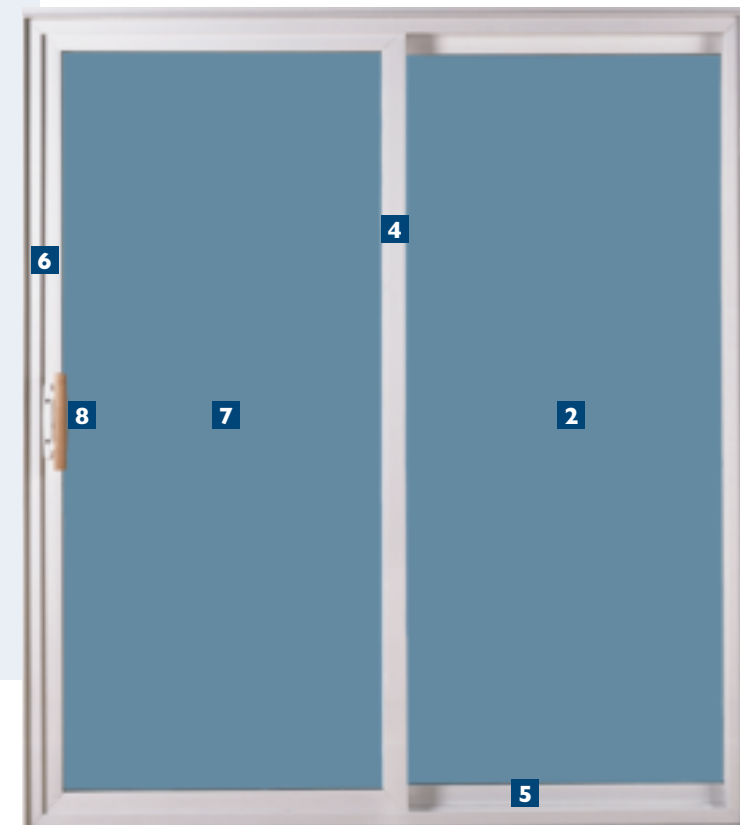

COLOR OPTION:

- White only

GLASS OPTIONS:

- Low-E glass
- Low-E glass with Argon Gas

GRID OPTION:

- 5/8" and 3/4" flat
- 1" Contoured

ALSO AVAILABLE:

- Screen optional

DIMENSIONS & SPECIFICATIONS

O=fixed panel
X=operable panel



Nominal Size	Opening Size	Exact Size Without Fin
5068	59 1/2" X 80"	58 3/4" X 79 1/2"
6068	71 1/2" X 80"	70 3/4" X 79 1/2"
6468	75 1/2" X 80"	74 3/4" X 79 1/2"

4 9/16" and 6 9/16" wood jamb extender kits available for new construction applications.



Proview supports the Energy Star for Windows program to promote energy-efficient products.